

YOUR ENVIRONMENT OUR CHALLENGE

IT manufacturer for the industry

MoniCom 19"

Industrial touch screen monitor, the MoniCom is the perfect solution for dry industrial environments.

Heavy duty and affordable, the MoniCom features an aluminum casing and a wide screen that make it an ideal industrial production management tool.

Control the progress of your production or follow up on attendance or inventories without leaving the site of your operations.



- Scratch-resistant 19" colour touch screen
- · Resistant to dust
- · Heavy-duty aluminum casing
- · Heavy-duty aluminum stand
- VGA Port
- USB/Serial interface for touch screen
- · Wall mount or table top stand included
- · Ideal for most Thin Client environment



Examples of uses

- Operation control terminal
- Quality control terminal
- Weight input station for electronic scales
- Display of work orders
- Display of part lists with photographs
- · 3D viewing of parts
- Label printing station
- · Information access point









IT manufacturer for the industry

1171 Notre-Dame St. West Victoriaville Quebec, Canada G6P 7L1


Phone: 819 751-0095


Toll free: 1 800-203-9421 (Can / USA) Toll free: 0-800-907-476 (France)

Fax: 819 751-1292

symcod@symcod.com

MoniCom Dimensions

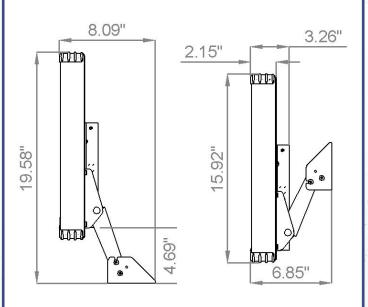



General Characteristics

Type: Active TFT

Touch Screen: ULTRA resistive type
Touch interface: Serial RS-232 and USB
Compatible: ELO (serial only) or driver available
Resolution: Color 19 inch 24 bits LCD TFT (1280 x 1024)

Hor. Frequency: 63.5/74.5/80.0 kHz (VESA)

Ver. Frequency: 60/75 Hz (VESA) Video Connector: VGA (DB-15)

Power: 12 VDC

External power supply 100-240 VAC 50-60Hz included **Stand:** Adaptable for wall mount or desktop use,

VESA100 mounting
Other: Red/Green LED

Certification: FCC • RoHS available

Limited warranty: 1 year on parts and labour at our workshop

(extended warranty available)

Physical Characteristics

Weight: Approximately 7 kg (15.50 lbs) with stand, without power supply.

Casing and stand: Painted aluminum

Dimensions: Wall mount position: $48.39 \text{ cm} \times 40.44 \text{ cm} \times 17.40 \text{ cm}$ ($19.05 \text{ in} \times 15.92 \text{ in} \times 6.85 \text{ in}$) / Desktop position: $48.39 \text{ cm} \times 49.73 \text{ cm} \times 20.55 \text{ cm}$ ($19.05 \text{ in} \times 19.58 \text{ in} \times 8.09 \text{ in}$)

Accessories and Options

Teflon tip pen (optional)

Environment

Operating temperature: 0°C to 55C° (32°F to 131°F) Storage temperature: -20°C to 60C° (-4°F to 140°F) Relative humidity: 20% to 80% without condensation