



# Symcod

Industrial computer and  
IT equipment manufacturer

## TermiCom W185-65

All-in-one industrial computer

**Make your operations easier with this durable and powerful industrial computer! The TermiCom W185-65 is the custom-built solution to effectively monitor and manage your operations. Its IP66/NEMA 4X certification and its airtight and waterproof stainless-steel case allow optimal use in all types of harsh environments such as wet or extreme dust environments.**

Known for its reliability and stability, the TermiCom W185-65 is the all-in-one device you need!



### Key advantages



Robust materials for  
an extended life cycle



Designed for  
extreme environments



Water resistance





Direct connection to all  
types of peripherals

## TermiCom W185-65



### Dimensions

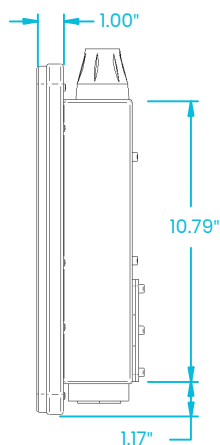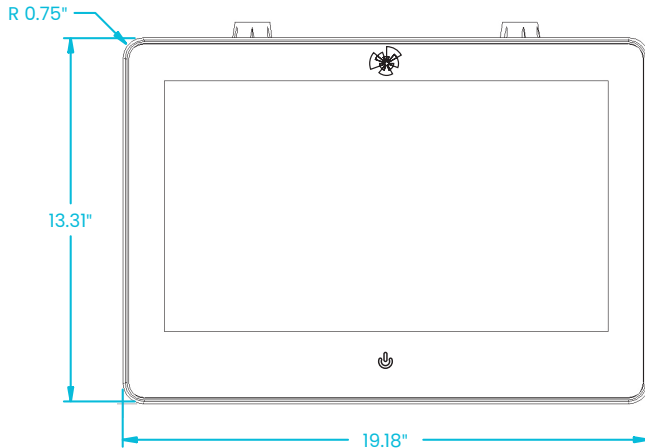

### Technical specifications

<b>Weight</b>	Approximately 9.9 kg (22 lbs)
<b>Power supply</b>	AC with external 24 VCC 60/50 Hz power supply / Terminal block 6-34 VCC
<b>Casing</b>	304 #4 stainless-steel / Adjustable cable
<b>Microprocessor</b>	Intel Low Power Consumption
<b>Memory (RAM)</b>	8 GB
<b>Memory</b>	240 GB flash drive
<b>Screen</b>	High definition 18.5" TFT color display / resolution 1920 x 1080 (16:9) / Projected capacitive touchscreen
<b>Inputs / Outputs</b>	1 to 3 serial ports / 2 to 4 USB ports 3.0 / 1 to 2 HDMI ports / 2 Ethernet 1000BaseT ports
<b>Operating system</b>	Windows or Linux
<b>Recommendations for installation</b>	Ethernet: CAT5 UTP (Unshielded twisted pair) cable, 24 AWG / 4 pairs, Stranded / Ethernet: Fixed CAT5 UTP (Unshielded twisted pair) cable / 24 AWG / 4 pairs / Solid
<b>Other</b>	Green LED (power on) / Blue LED (under voltage)
<b>Certification</b>	CE / FCC / RoHS available
<b>Limited warranty</b>	2 years on parts and labour at our workshop (extended warranty available)

### Accessories and Options

WiFi 802.11 ac/a/b/g/n and Bluetooth / Sealed SKT keyboard / External reader: CCD, laser, pencil, slot reader, proximity reader, biometric reader Printer, parallel port / Scale

### Environment

**Operating temperature:** 0°C to 55°C (32°F to 131°F)

**Storage temperature:** -20°C to 60°C (-4°F to 140°F)

**Relative humidity:** 20% to 80% without condensation