



Symcod

Industrial computers and
IT equipment manufacturer

W101M-65

All-in-on computer

Dust and waterproof, the Symcod W101M-65 is a compact and versatile touch screen computer that will be perfect to simplify the management and monitoring of your operations.

This 10.1" computer installs quickly and is very resistant thanks to its food grade stainless steel casing.

Compact and versatile; the W101M-65 is the type of all-in-one device you need!



W101M-65, 10.1" touch screen with integrated camera and proximity reader



Resistance to water, acid, dust, welding, vibration, shocks, etc.




Reliability for 24/7 operations, SSD and fanless



North American premium quality design and manufacturing, with top of the line components



Service & support offered for at least 8 years & emergency unit replacement program

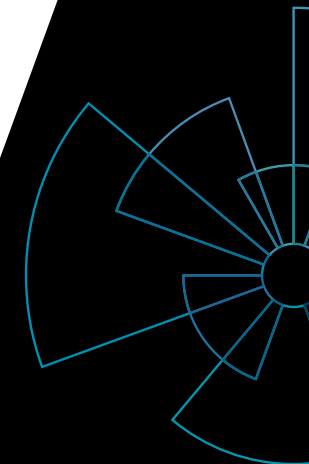

W101M-65

Technical specifications

Approximate weight	4,9 kg (11 lb)
Power supply	9 to 36 VDC, pluggable terminal block, external power supply included / Approx. 30 W consumption
Casing	Stainless steel 304 #4 / VESA 100 mounting (bracket not included)
Microprocessor	Intel low power consumption / J3455 / N3350
Memory (RAM)	4 GB to 8 GB
Memory	64 GB to 240 GB flash drive
Screen	10,1" tempered glass projected capacitive touchscreen / Ratio 16:10 / Resolution 1920 x 1080 / 350 nits / Strengthened glass substrate
Inputs / Outputs	Sealed cable transit system 2 USB 3.0 ports / 1 USB 2.0 port / 1 HDMI port / 1 SVGA port / 2 audio ports (Mic-in, Line-out) / 2 Ethernet 1000BaseT / 2 optional serial ports
Operating system	Windows or Linux
Installation	Ethernet : Minimum CAT5 UTP (unshielded twisted pair) stranded or solid cable
Others	Blue LED (under voltage)
Certification	CSA / CE / FCC / RoHS
Limited warranty	2 years on parts and labour at our workshop (extended warranty available)
Accessories & options	WiFi 802.11 ac/a/b/g/n and Bluetooth / Internal proximity reader / Internal camera / Heating element / Sealed SKT keyboard
Environment	Operating temperature : -20 °C* to 55 °C (-4 °F* to 131 °F) Storage temperature : -20 °C to 60 °C (-4 °F to 140 °F) Relative humidity : 100% <small>*required conditions</small>

