



Symcod

Industrial computers and
IT equipment manufacturer

XR15-66

All-in-on computer

Effectively control all your operations with this industrial computer! Whatever your working environment, XR15-66 allows you to optimally manage your production and monitor time and inventory. In addition to being robust, this 15" industrial computer is IP66/NEMA 4X certified and also guarantees operation in the most harsh environments of your production areas!

Known for its robustness and versatility; the XR15-66 is the computer you need!



XR15-66, 15" touch screen



Resistance to water, acid, dust, oil, welding, vibration, shocks, etc.




Reliability for 24/7 operations, SSD and fanless



North American premium quality design and manufacturing, with top of the line components



Service & support offered for at least 8 years & emergency unit replacement program

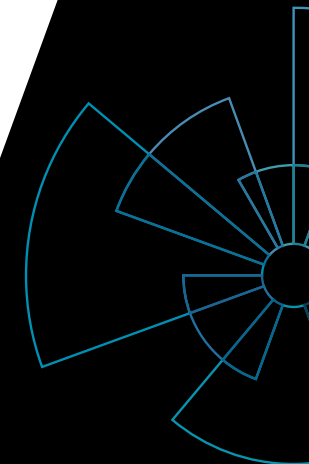

XR15-66

Technical specifications

Approximate weight	13.6 kg (30 lb) with stand
Power supply	120/240 VAC 60/50 Hz / Approx. 40 W consumption
Casing	#4 304 stainless-steel / Stand for wall mount or desktop position / Industrial connectors
Microprocessor	Intel low power consumption / N4200
Memory (RAM)	8 GB to 16 GB
Memory	240 GB flash drive
Screen	15" analog resistive anti-glare touchscreen / Ratio 4:3 / Resolution 1024 x 768 / 350 nits / Strengthened glass substrate
Inputs / Outputs	Sealed connectors / 3 serial ports / 3 USB ports 3.0 / 1 Ethernet 1000BaseT port
Operating system	Windows or Linux
Installation	Ethernet : Minumum CAT5 UTP (unshielded twisted pair) stranded or solid cable
Others	Blue LED (under voltage)
Certification	CE / FCC / RoHS disponible
Limited warranty	2 years on parts and labour at our workshop (extended warranty available)
Accessories & options	WiFi 802.11 ac/a/b/g/n and Bluetooth/ Heating element / Sealed SKT keyboard / External reader: laser, proximity reader, printer, cale
Environment	Operating temperature : -20 °C* to 55 °C (-4 °F* to 131 °F) Storage temperature : -20 °C to 60 °C (-4 °F to 140 °F) Relative humidity : 100% *required conditions



Symcod

