



# Symcod

Industrial computers and  
IT equipment manufacturer

## SM200

### Industrial Box PC


These box PC's industrial-grade components and special features make it ideal for demanding industrial applications.

Although very robust, the SM200 is easy to install on DIN rails, thanks to its bracket-ready housing design.

Opt for a reliable and durable industrial Box PC, combined with high performance. Our SM200 is the equipment for automated tasks and much more!



SM200 Box PC

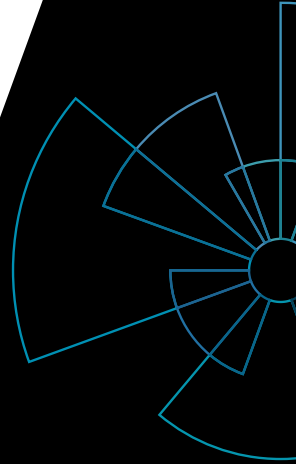

**Resistance** to dust, welding, vibration, shocks, etc.



**Reliability** for 24/7 operations, SSD and fanless



**North American** premium quality design and manufacturing, with top of the line components



**Service & support** offered for at least 8 years & emergency unit replacement program



# SM200

## Technical specifications

<b>Approximate weight</b>	3,13 kg (6,9 lb)
<b>Power supply</b>	12 to 28 V terminal block (power supply not included) / Approx. 120 W consumption
<b>Casing</b>	Aluminum with cooling system
<b>Microprocessor</b>	Intel i3, 12th generation
<b>Memory (RAM)</b>	8 GB to 64 GB
<b>Memory</b>	2 removable 2.5" hard disks 120 GB or more
<b>Inputs / Outputs</b>	2 USB 3.2 ports / 2 USB 2.0 ports / 1 HDMI port / 2 Display ports / 2 Ethernet 2500BaseT ports and 1 Ethernet 1000BaseT port / 2 audio ports (Mic-in, Line-out) / option of 4 serial ports
<b>Operating system</b>	Windows or Linux
<b>Installation</b>	Ethernet : Minimum CAT5 UTP (unshielded twisted pair) stranded or solid cable
<b>Others</b>	DIN Rail mounting (2 brackets required) / Earth ground terminal
<b>Certification</b>	CE / FCC / RoHS
<b>Limited warranty</b>	2 years on parts and labour at our workshop (extended warranty available)
<b>Accessories &amp; options</b>	WiFi 802.11 ac/a/b/g/n / Bluetooth and external cellular / 4 serial ports / Bracket for DIN rail (2)
<b>Environment</b>	Operating temperature : 0 °C to 55 °C (32 °F to 131 °F) Storage temperature : -40 °C to 85 °C (-40 °F to 185 °F) Relative humidity : 5% to 90% without condensation

