

Industrial computers and IT equipment manufacturer

## Modular Industrial Computer

- Rugged All-in-One PC
- 24/7 Operation with Fanless Industrial CPU
- 3mm Tempered Glass
  Capacitive Touchscreen
- Integrated RFID Reader



**Demo Loan** 

**Fast Delivery** 

Extended SLA & Service Depot

Direct Support & Fast Repairs



## **W156M**









## **Modular Industrial All-in-One PC** with 15.6" Touch Screen

IP50 / NEMA 3 **Ingress Protection** 

Aluminum / VESA 100 mounting Casing

(bracket not included)

Screen 15,6" tempered glass projected capacitive

touchscreen / Ratio 16:9 / Resolution 1920 x 1080 / 350 nits / Shatterproof

strengthened glass substrate

AC with external 120/240 VCC 60/50 Hz **Power Supply** 

(power supply not included, at least 90W recommended) / 24 VCC terminal block

Operating: -20 °C\* to 55 °C (-4 °F\* to 131 °F) **Temperature** Storage: -20 °C to 60 °C (-4 °F to 140 °F)

Relative humidity: 20% to 80% without condensation

\*required conditions

2,8 kg (6,2 lb) **Approximate Weight** 

Accessories & Options Internal proximity reader / Control button module /


Side Handles / VESA 100 wall mount /

Adjustable VESA 100 stand / Panel mounting / Customization / Silicone sealed keyboard

**Limited Warranty** 2 years on parts and labour at our workshop


(extended warranty available)

Microprocessor	ARM Rockchip D3588	Intel Alder Lake N97
Memory (RAM)	8 GB	8 GB or more
Storage	32 GB	240 GB or more
Included I/O	2 x LAN 1 GB 1 x USB 3.0 (STD) 1 x USB 3.0 (OTG) 2 x USB 2.0 1 x HDMI	1 x LAN 2.5 GB 1 x LAN 1.0 GB 2 x USB 3.2 Gen2 2 x USB 2.0 1 x SVGA 1 x HDMI
Optional I/O	1 x COM	1 x DP up to 3 x COM
Operating System	Android 12 or Linux Debian	Windows 10/11 or Linux Ubuntu
Network Connectivity	WiFi/Bluetooth	WiFi/Bluetooth

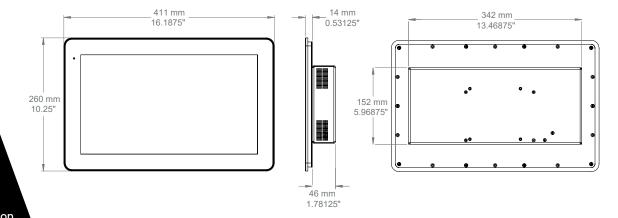

**Panel Mounting** 

**Cutout Dimensions** 



Tolerance: ±1/8" (±3 mm)

Input & Output







symcod.com



