



Symcod

Industrial computers and
IT equipment manufacturer

Modular Industrial Monitor

- Rugged Display
- 3mm Tempered Glass
Capacitive Touchscreen
- Aluminum Casing



Demo Loan

Fast Delivery

**Extended SLA
& Service Depot**


**Direct Support &
Fast Repairs**



W156M-DP


Modular Industrial Monitor with 15.6" Touch Screen

Ingress Protection	IP50 / NEMA 3
Casing	Aluminum / VESA 100 mounting (bracket not included)
Screen	15,6" tempered glass projected capacitive touchscreen / Ratio 16:9 / Resolution 1920 x 1080 / 350 nits / Shatterproof strengthened glass substrate
Power Supply	AC with external 120/240 VCC 60/50 Hz (power supply not included, at least 90W recommended) / 24 VCC terminal block
Input & Output	1 x HDMI / 1 x VGA / 1 x DVI / 1 x USB (for touchscreen)
Temperature	Operating : -20 °C* to 55 °C (-4 °F* to 131 °F) Storage : -20 °C to 60 °C (-4 °F to 140 °F) Relative humidity : 20% to 80% without condensation *required conditions
Approximate Weight	2,8 kg (6,2 lb)
Accessories & Options	Control button module / Side Handles / VESA 100 wall mount / Adjustable VESA 100 stand / Panel mounting / Customization / Silicone sealed keyboard
Limited Warranty	2 years on parts and labour at our workshop (extended warranty available)

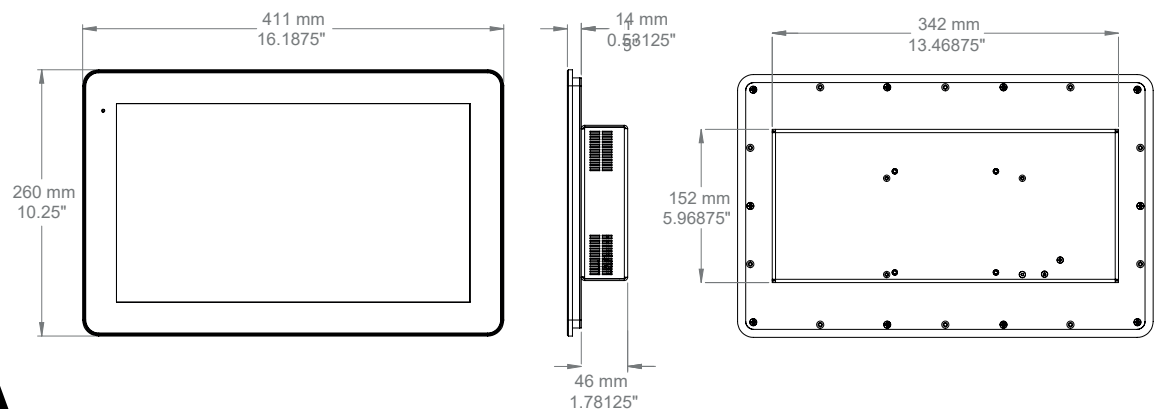

Panel Mounting
Cutout Dimensions

Tolerance: $\pm 1/8"$ (± 3 mm)

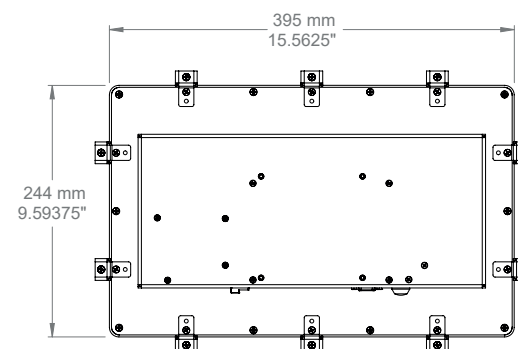

Input & Output

