

Industrial computers and IT equipment manufacturer

Modular Industrial Monitor

- Rugged Display
- 3mm Tempered Glass Capacitive Touchscreen
- Aluminum Casing




Demo Loan

Fast Delivery

Extended SLA & Service Depot

Direct Support & Fast Repairs



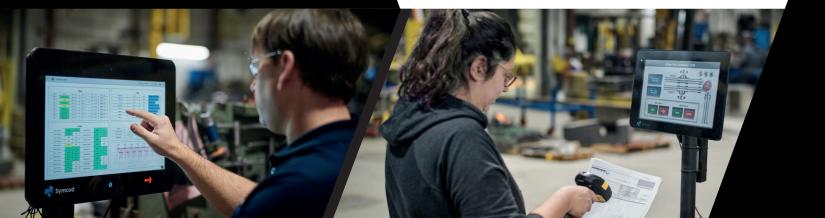

W238M-DP

Symcod

Modular Industrial Monitor with 23.8" Touch Screen

IP50 / NEMA 3 **Ingress Protection**

Aluminum / VESA 100 mounting Casing

(bracket not included)

Screen 23,8" tempered glass projected capacitive

touchscreen / Ratio 16:9 / Resolution 1920 x 1080 / 350 nits / Shatterproof

strengthened glass substrate

AC with external 120/240 VCC 60/50 Hz **Power Supply**

(power supply not included, at least 90W recommended) / 24 VCC terminal block

1x HDMI / 1x VGA / 1x DVI / 1x USB (for touchscreen) **Input & Output**

Operating: -20 °C* to 55 °C (-4 °F* to 131 °F) Temperature

Storage: -20 °C to 60 °C (-4 °F to 140 °F)

Relative humidity: 20% to 80% without condensation

*required conditions

Approximate Weight 6,85 kg (15,1 lb)


Accessories & Options Control button module / Side Handles /

Single-cable rooting through mounting arm / VESA 100 wall mount / Adjustable VESA 100 stand /

Panel mounting / Customization / Silicone sealed keyboard


Limited Warranty 2 years on parts and labour at our workshop

(extended warranty available)

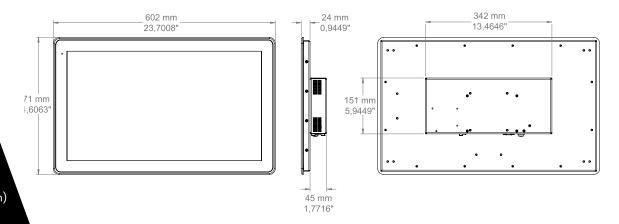

Panel Mounting

Cutout Dimensions



Tolerance: ±1/8" (±3 mm)

Input & Output







